



## 60W Open Frame Switching Power Supply

<b>Model</b>	<b>UOA360</b>	
<b>Package</b>		
<b>L*W*H(mm)</b>	<b>103*46*32.6</b>	
<b>DC Output Rating</b>	<b>A</b> <b>5V / 2.0A</b> <b>12V / 4.3A</b>	<b>B</b> <b>5V / 3.0A</b> <b>12V / 3.0A</b>
<b>Safety</b>		

### FEATURE:

Constant Voltage Mode  
Super Mini Size and Easy Portable

### APPLICATION:


Hard Disk  
Wireless Lan Station  
DVD

### INPUT/OUTPUT SPECIFICATIONS:


Input Voltage:	AC100V-240V,50/60Hz
Range Voltage:	AC 90V-264V,47/63Hz
Output Power:	60W
Output Voltage:	5V/12V Dual output
Over Current Protection:	120% Min
Over Voltage Protection:	120% Min
Short Protection:	Auto Recovery
Load Regulation:	±5%

### GENERAL SPECIFICATIONS:

Operating Temperature:	0 ~ 50°C
Operating Relative Humidity:	5 ~ 95%RH
Storage Temperature:	-20 ~ 65 °C
Withstanding Voltage:	AC 3000V/Min (between Input & Output),10mA(Max.)
Insulation Resistance:	DC 500V 100MΩ(Min.) (between Input & Output)
Efficiency:	75% Min

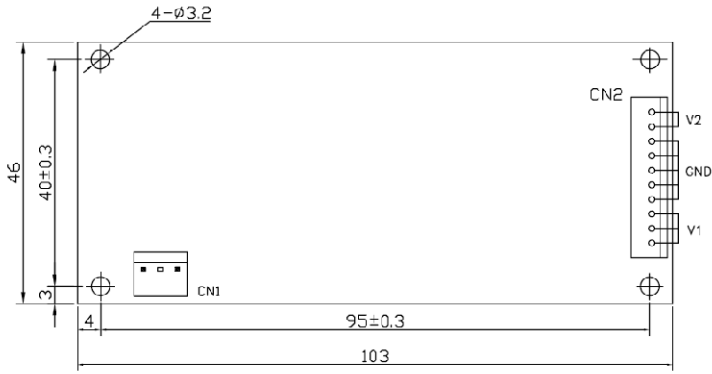


CN1

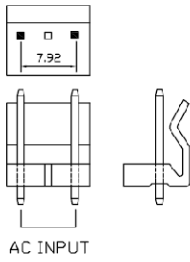

AC INPUT

CN1: INPUT CONNECT  
MODEL: MOLEX 5273-03A  
(THE EQUIVALENT)

CN2

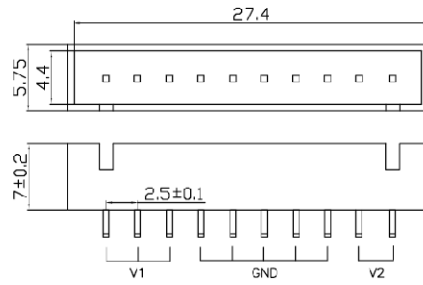

CN2: OUTPUT CONNECT  
MODEL: JST B10B-XH-A  
(THE EQUIVALENT)